

Introduction

The Waterloo YGK are small format adjustable louvres manufactured from aluminium extrusion, with adjustable blades. This means that for applications where volume control is important there is no need for an additional damper. Saving in the cost, the installation and the space required.

The mechanism can be installed on the front or rear, left or right hand side. The YGK comes as standard with a rectangular aluminium perforated plate on the rear side. Options include two different frames, a drip cill and a selection of fixings.

These louvres have proven to be weatherproof even under the most adverse conditions.

Product Description

YGK-EF Externally flanged small format adjustable louvre

YGK-RF Recessed frame small format adjustable louvre.

Features

- Weatherproof
- Adjustable blades
- Rear side perforated plate attached as standard

Finish

PPM9006 (RAL 9006 Matt Silver)
PPM9010 (RAL 9010 20% Gloss White)
PPG9010 (RAL 9010 Gloss White)

Other colours or anodised finish available on request

Weight

YGK 12.0 kg/m² panel


Sizes

Nom. W 200 - 1000 mm
Nom. H (YGK-EF) 187.5 - 975.0 mm
in 37.5 mm increments
Nom. H (YGK-RF) 197.5 - 985.0 mm
in 37.5 mm increments


Fixing

SF Screw fixing
LF Rear lug fixing
NF No fixing

Please contact head office to select an order

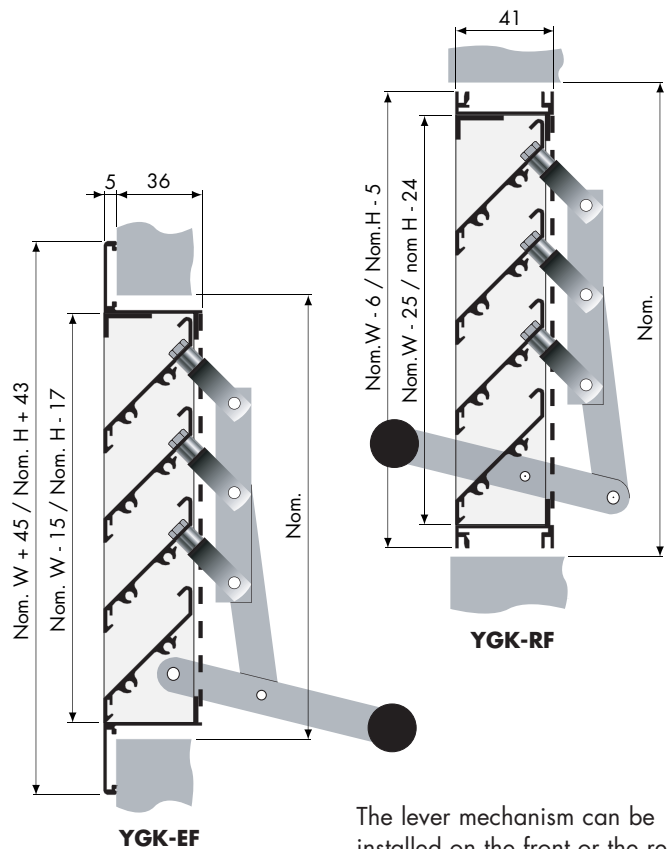

The lever mechanism can be installed on the front or the rear of the louvre. Standard fitting is the left hand rear side.

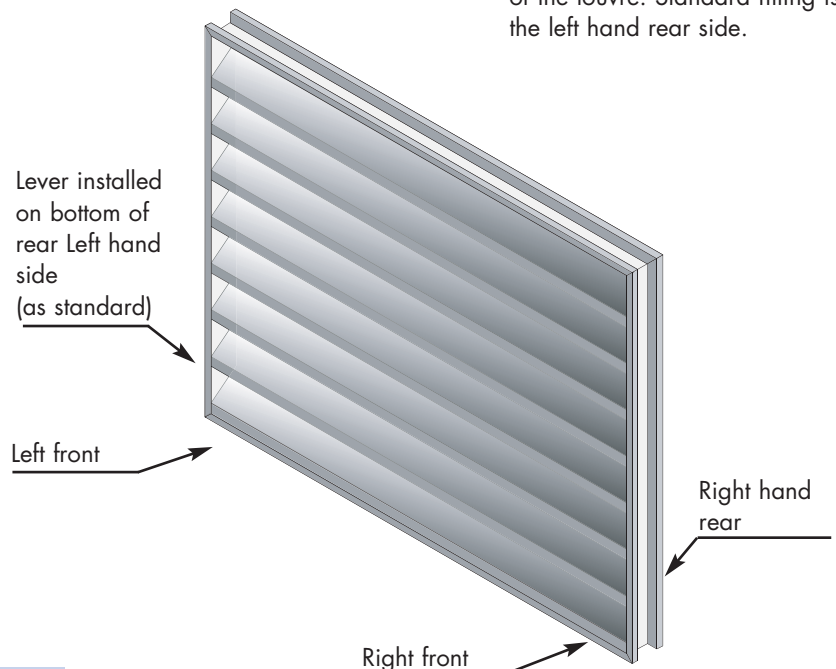

Order Example

YGK-EF/800x525/PPM9006/LF

Louvre Type _____
Nominal Width _____
Nominal Height _____
Finish _____
Fixing _____