

DVS-P Air Valves

DESCRIPTION


The DVS-P range of high quality supply air valves are constructed from steel spinnings protected by a gloss white (RAL9010) powder coated finish. The valve body is fitted with a cellular foam sealing gasket and all units are supplied with a plated steel mounting subframe. Air flow adjustment is achieved by rotating the central core inwards or outwards on it's spindle, a locking nut arrangement is provided to set the desired position.



APPLICATION

DVS-P steel supply air valves provide a clean, attractive and cost effective way of supplying air to toilets, bathrooms, cleaners cupboards etc. Air valves are best used in air distribution systems handling relatively small air volumes. The DVS-P air valve is designed for supply applications.

Type	Size	Volume (l/s):	10	20	30	40	50	60	80	100	120
DVS-P	100	Ps (Pa)	10	25	50	-	-	-	-	-	-
		dBA	\	25	42	-	-	-	-	-	-
		Throw m	0.8	1.2	1.9	-	-	-	-	-	-
	125	Ps (Pa)	-	9	20	30	45	65	-	-	-
		dBA	-	\	22	36	41	-	-	-	-
		Throw (m)	1.4	2	2.4	2.8	3.2	-	-	-	-
	150	Ps (Pa)	-	-	9	18	25	42	75	-	-
		dBA	-	-	\	23	32	38	47	-	-
		Throw (m)	-	-	0.8	1.1	1.5	1.7	2.1	-	-
	200	Ps (Pa)	-	-	-	8	13	17	30	45	55
		dBA	-	-	-	\	\	\	31	37	42
		Throw (m)	-	-	-	1.1	1.4	1.6	2	2.3	2.7

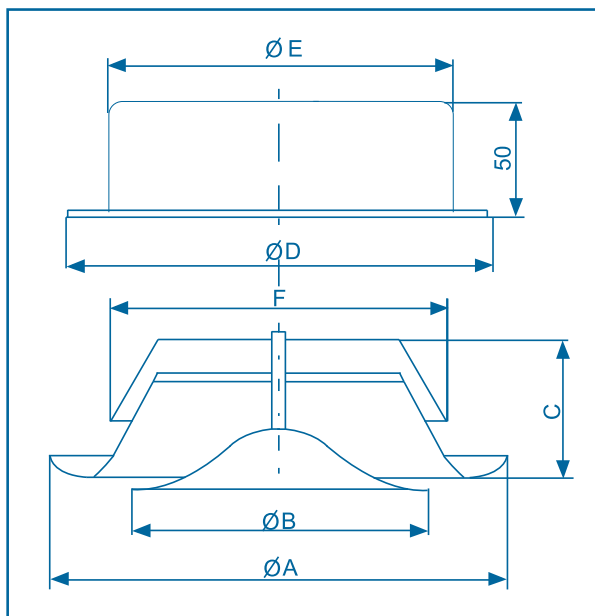

DVS-P	Ø080	Ø100	Ø125	Ø150	Ø160	Ø200
A	115	138	164	202	211	248
B	76	92	111	135	147	194
C	42	40	46	50	54	63
D	105	125	150	175	185	225
E	79	99	124	149	159	199
F	77.5	97.5	122.5	147.5	157.5	197.5